


10'

10'

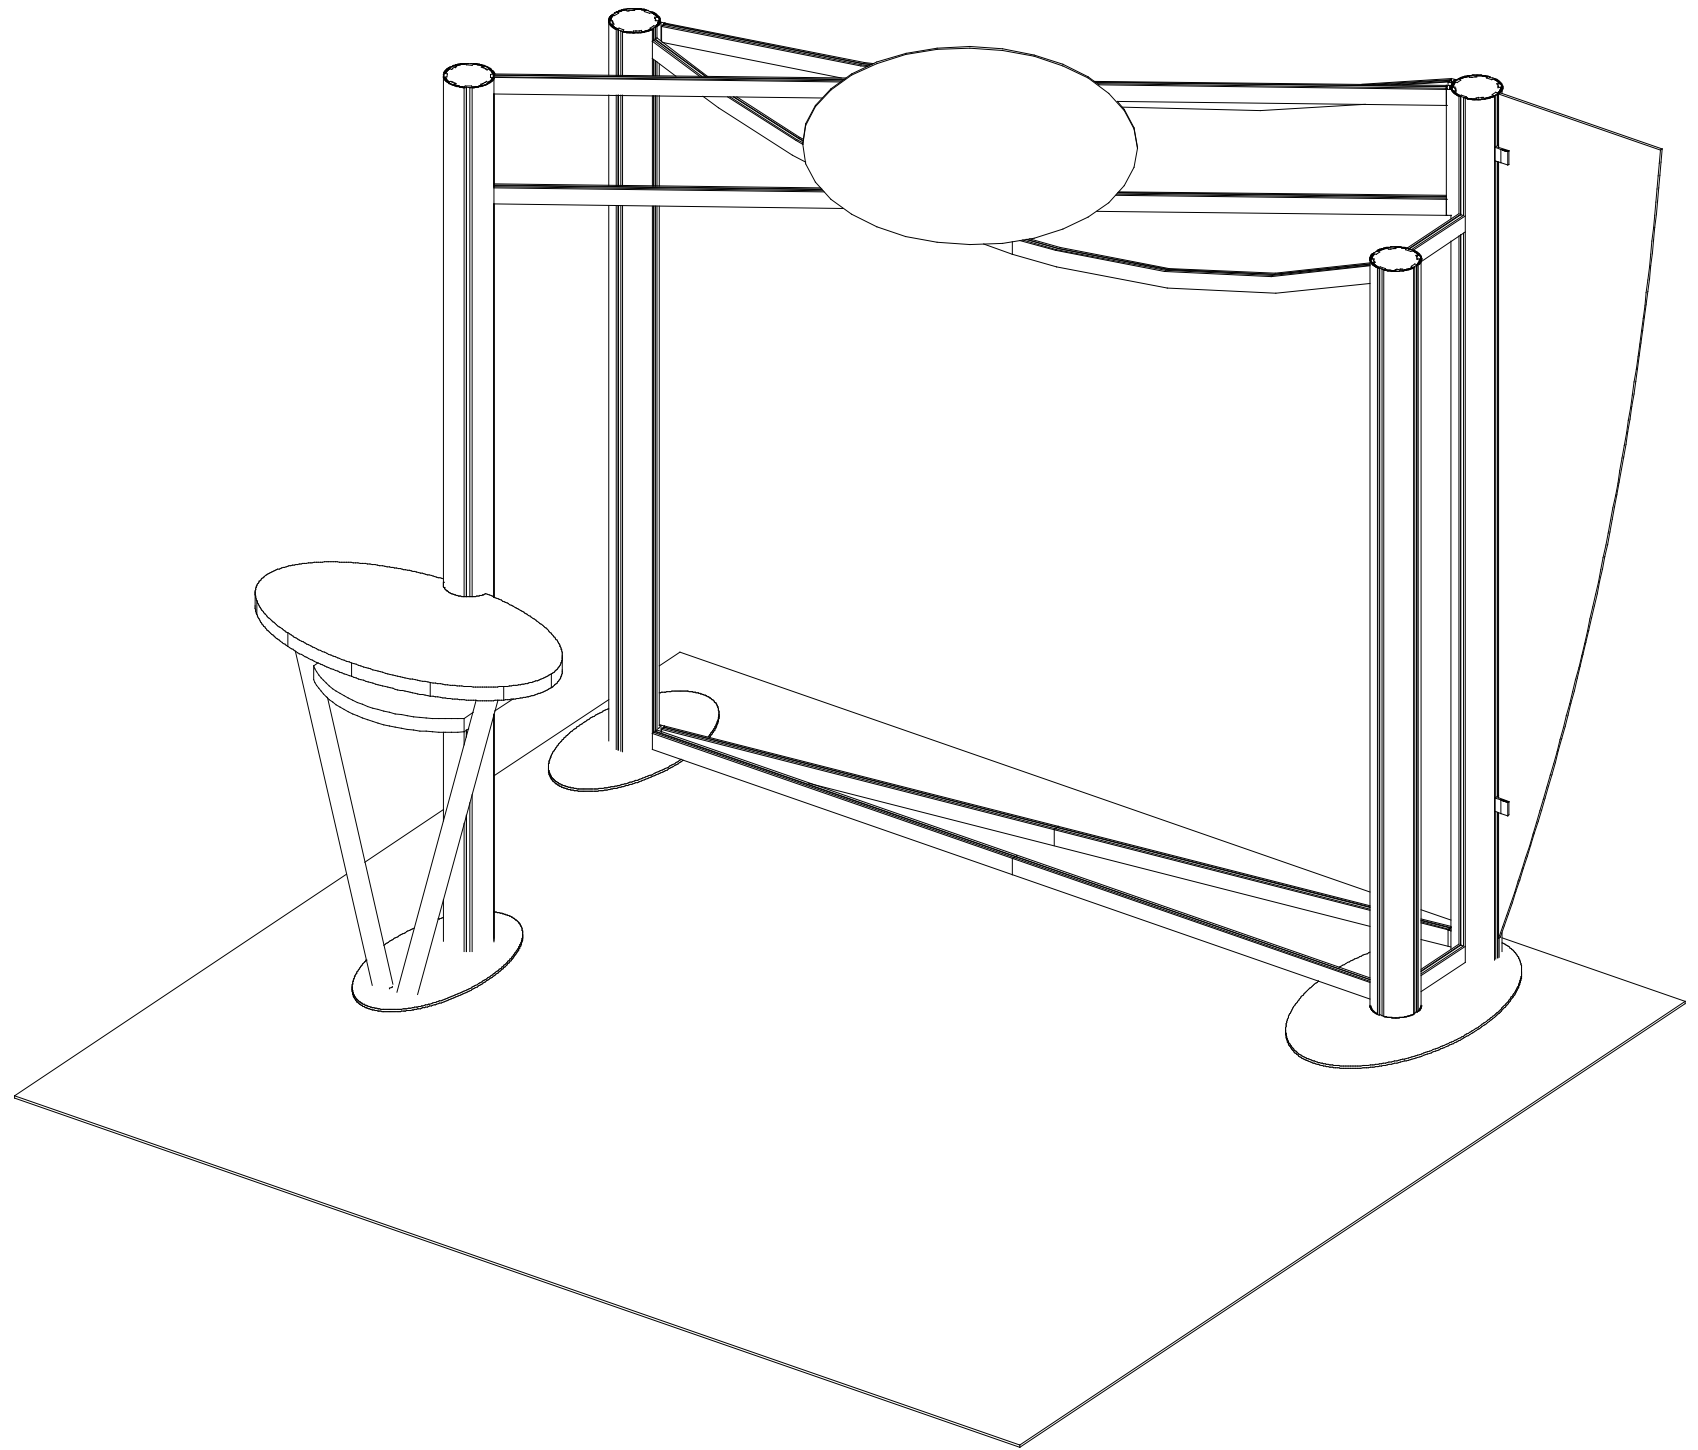

# ***SETUP INSTRUCTIONS***

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

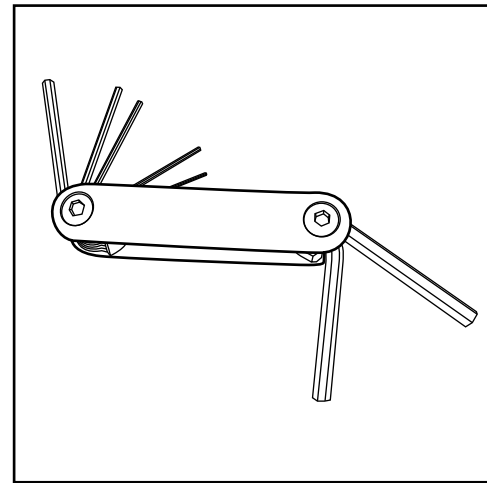


Hex Tool - Essential for Assembly

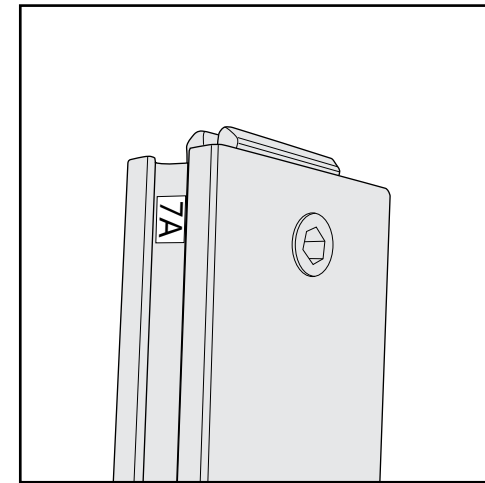


Part Identification - Numbering

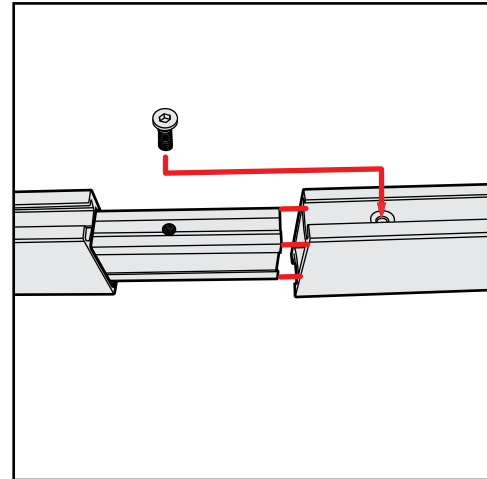


Spline Connection

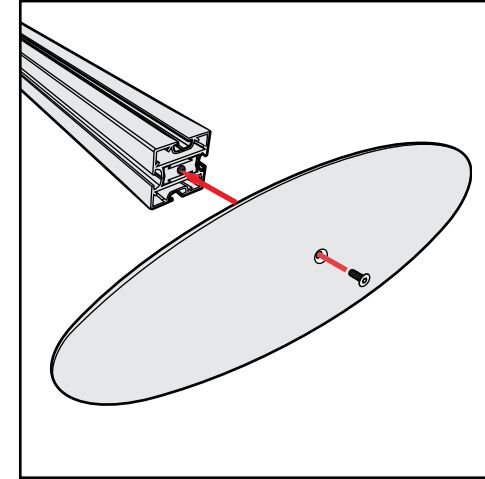

Base Plate & Extrusion Connection

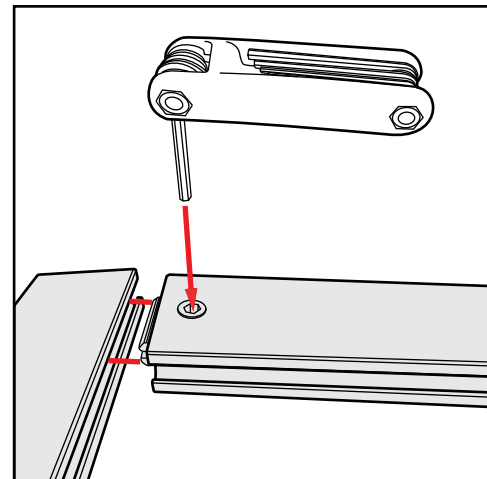

Extrusion & Lock Connection

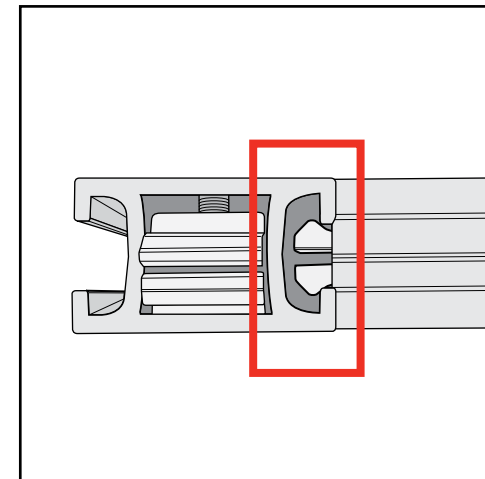


Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED



ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


Top View of each Level

#2, 2a, 3 and 3a

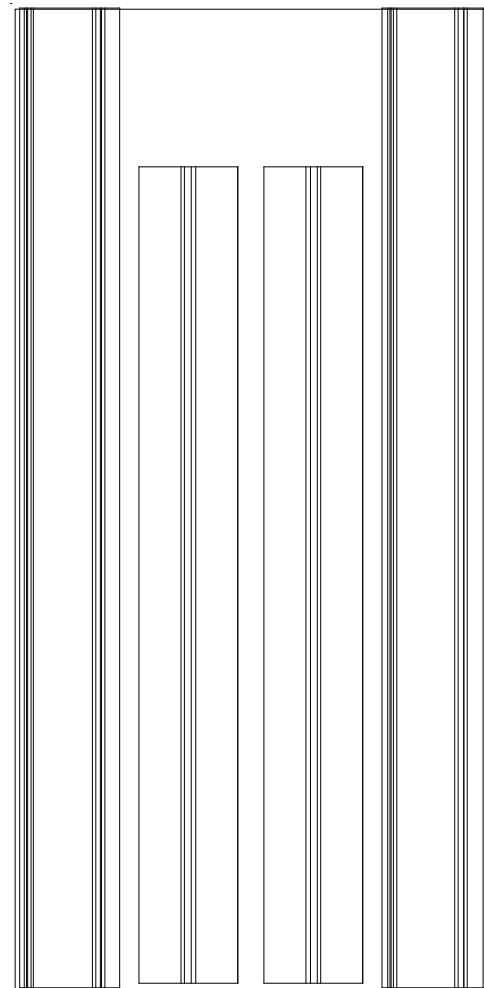

Level 1

Wing panels and header

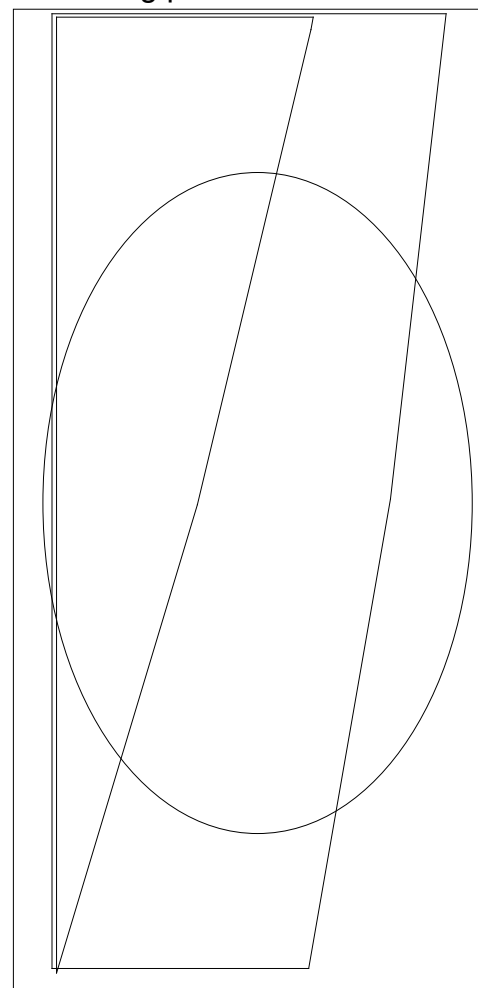


Level 2

Setup Hardware

Graphics


Top View of each Level

#4, 4a, 12 and 12a

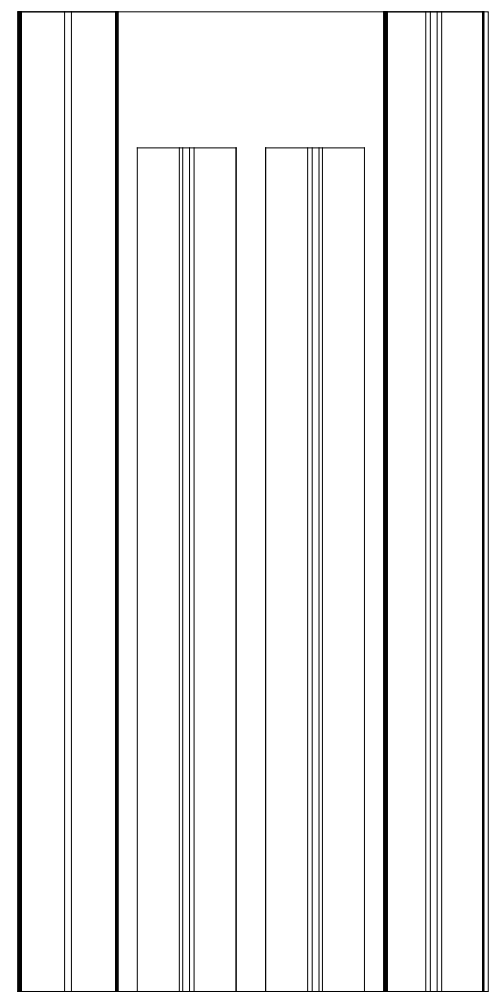


Level 1

Wing panels and header

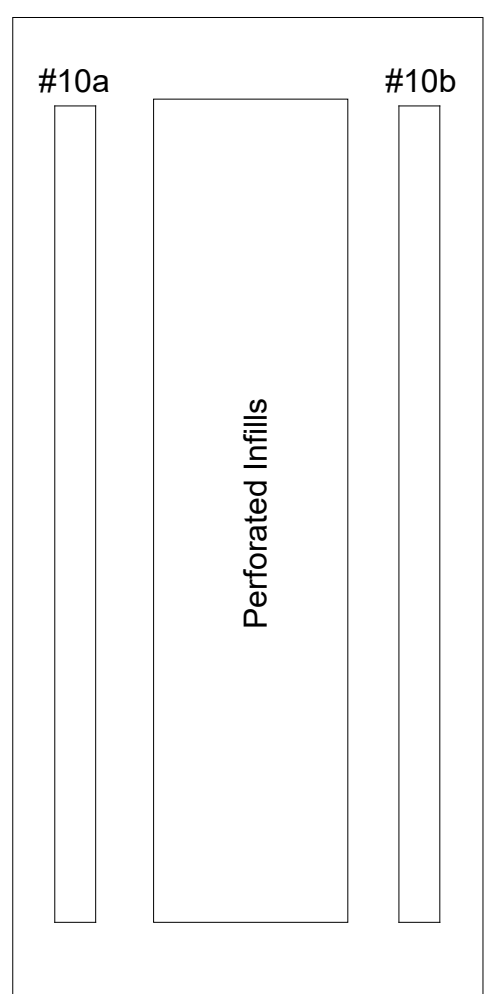


Level 2


Lights

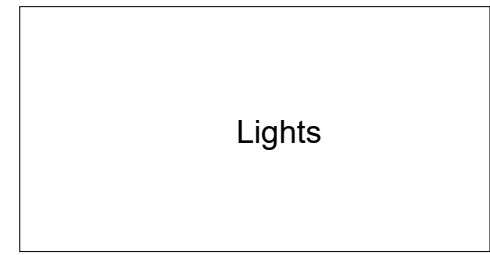


Top View of each Level

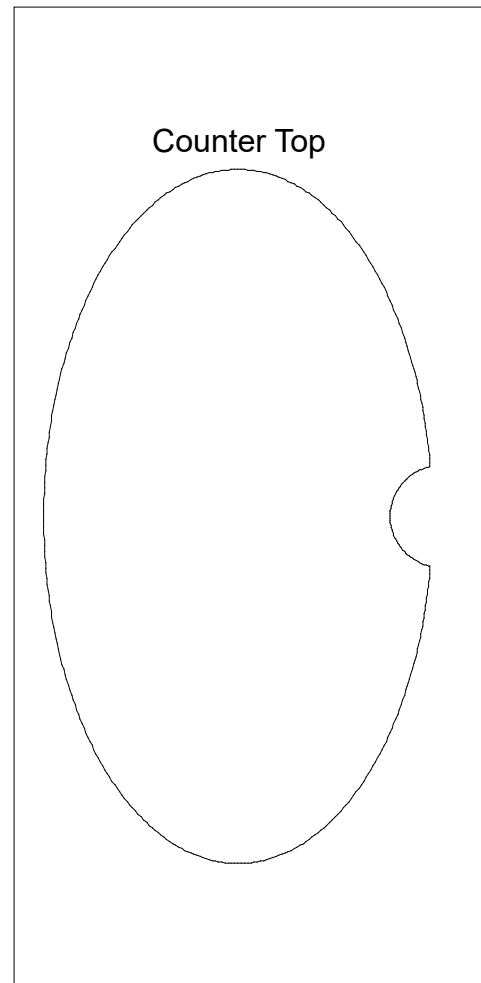

Level 1

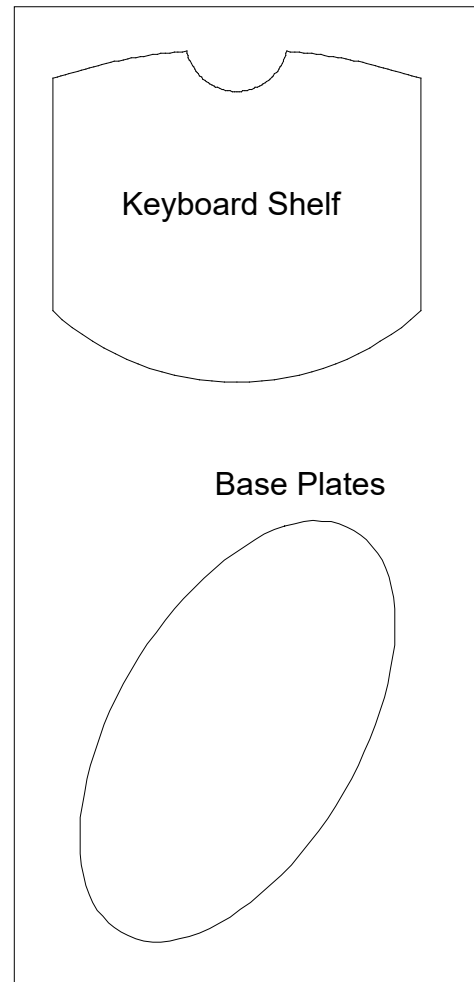



Level 2

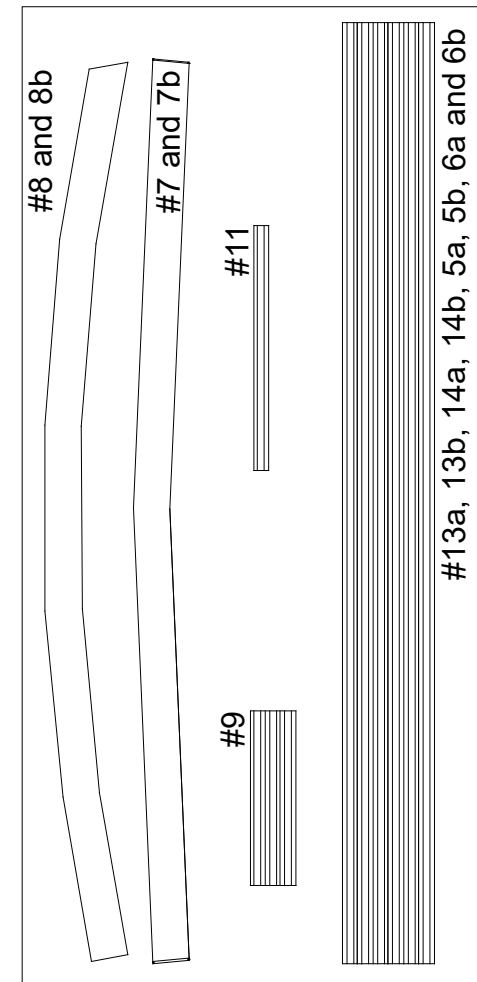

Level 3




Item	Qty.	Description
1a/1b	1/1/1	Base Plate
2/2a	1/1	40" h Vertical Extrusion
3/3a	1/1	48" h Vertical Extrusion
4/4a	1/1	41.36" h Vertical Extrusion
5a/5b	1/1	43.087" w Horizontal Extrusion
6a/6b	1/1	43.01" w Horizontal Extrusion
7a/7b	1/1	44.4215" w Horizontal Extrusion
8a/8b	1/1	45.1683" w Horizontal Extrusion
9	3	8.551" w Horizontal Extrusion

- Steps:**
- 1) Attach vertical extrusions [2, 3 and 4] to base plates [1a and 1b], see detail D on general info. page.
  - 2) Assemble vertical extrusions together.
  - 3) Connect horizontal extrusions [5a to 5b, 6a to 6b, 7a to 7b and 8a to 8b].
  - 4) Attach horizontal assemblies between vertical extrusions.
  - 5) Apply graphics to assembled backwall as shown.

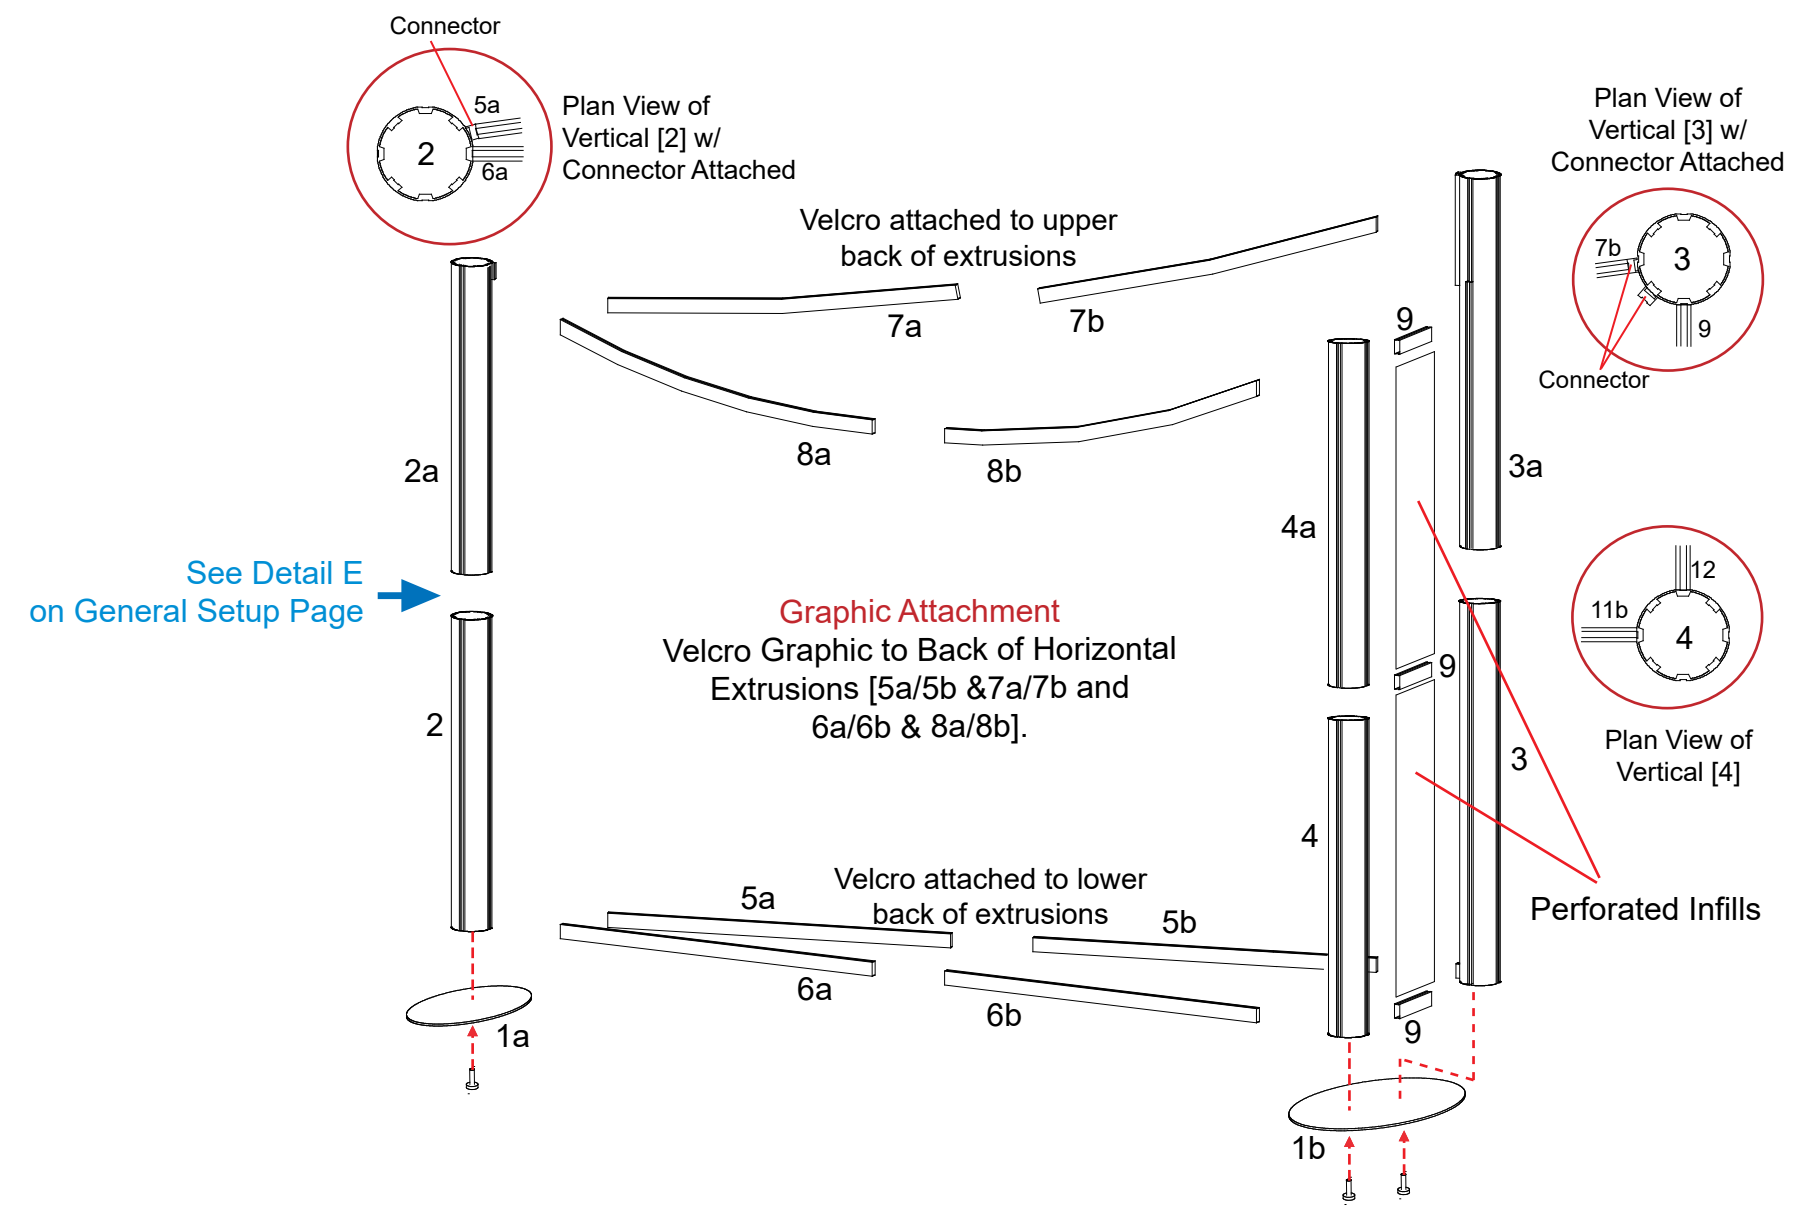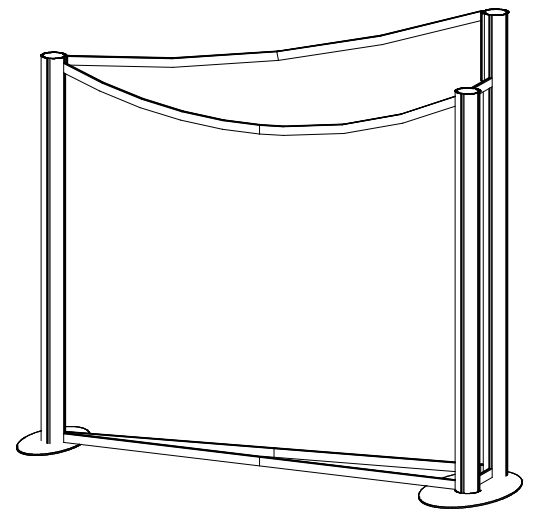

Item	Qty.	Description
1c	1	Base Plate
10a	1	Support Leg Left
10b	1	Support Leg Right
11	1	Shelf Support
12/12a	1	48" h Vertical Extrusion
13a/13b	1/1	46.25" w Horizontal Extrusion
14a/14b	1/1	46.25" w Horizontal Extrusion

- Steps:
- 1) Attach vertical extrusion [12] and support legs [10a and 10b] to base plate [1c].
  - 2) Attach shelf support [11] between support legs [10a and 10b], then set shelf atop support with notched side fitting to vertical extrusion and secure with thumbscrews to vertical extrusion [12].
  - 3) Connect horizontal extrusions together [13a to 13b and 14a to 14b].
  - 4) Attach horizontal assemblies between vertical extrusions [3 and 12], placing insert as shown.
  - 5) Attach wings to vertical extrusion [3], see wing attachment detail.

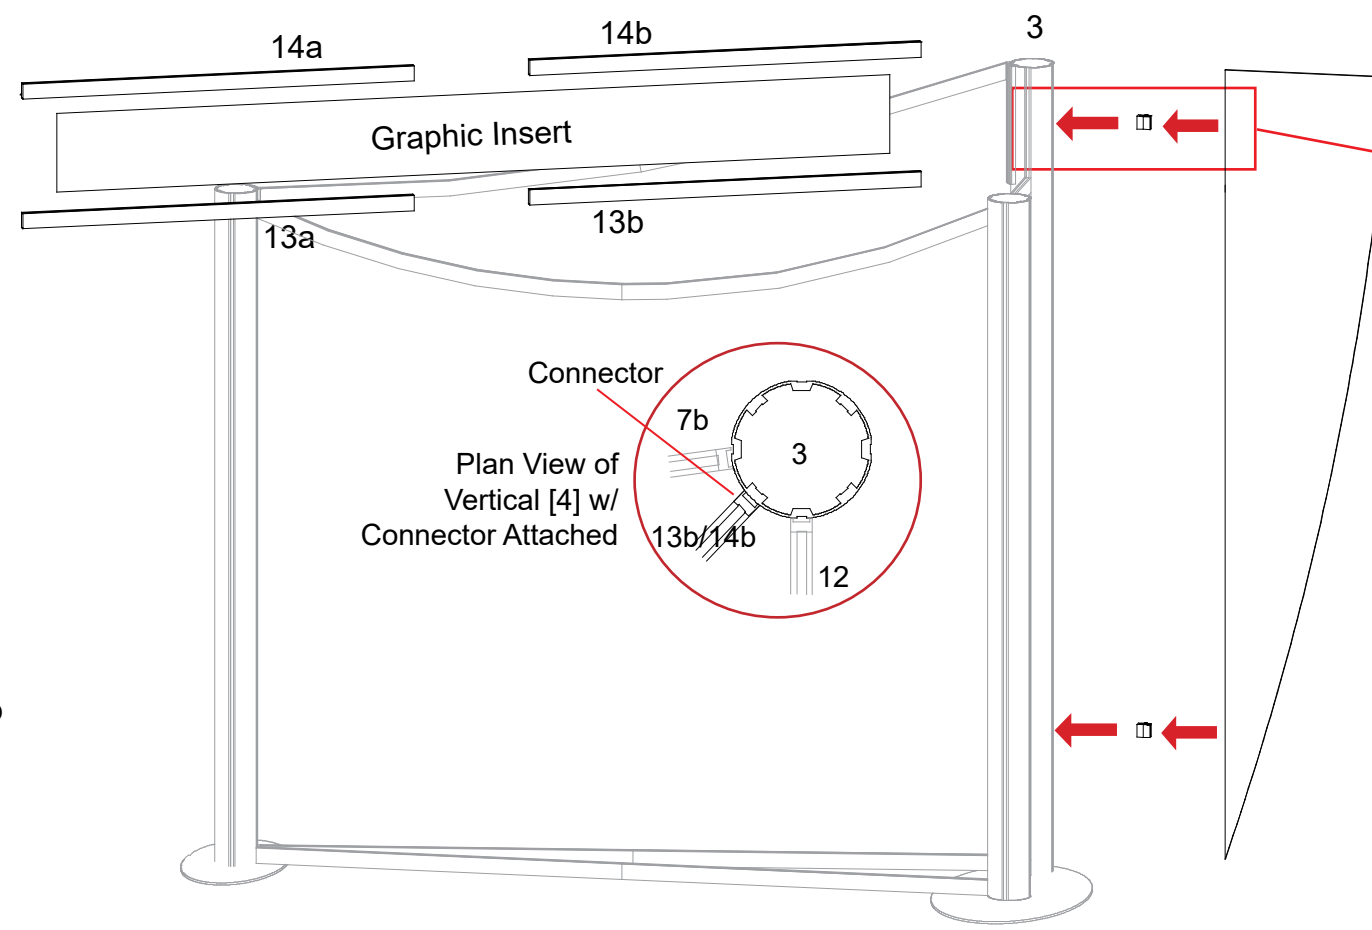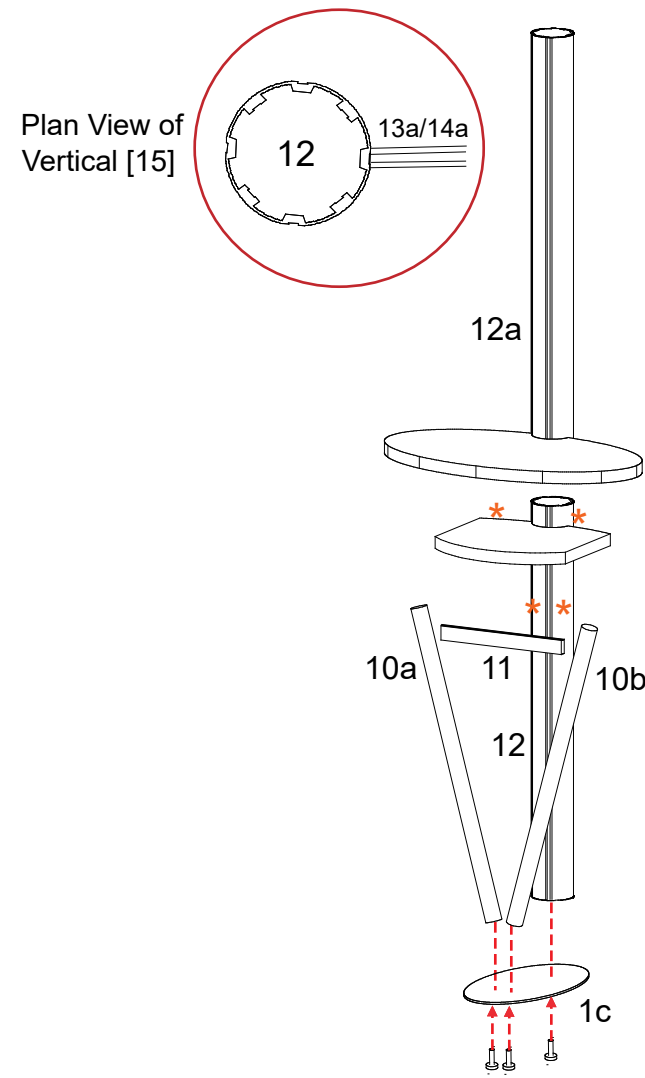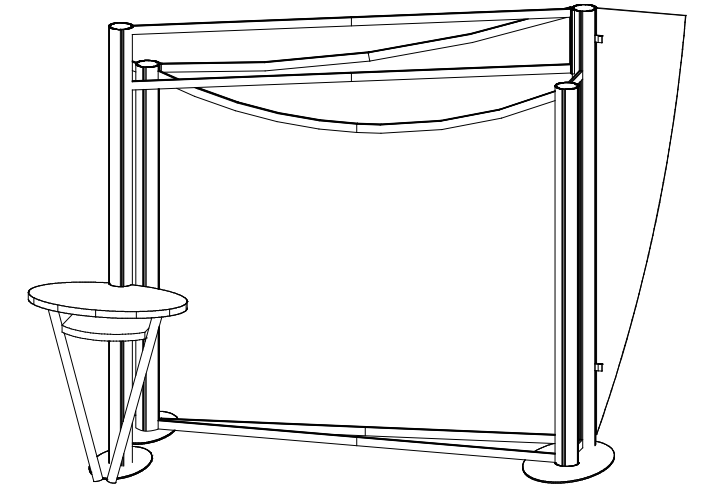

\* = Thumbscrew Location

**Wing Attachment**

Slide A10 Clamp into groove of square extrusion.

A10


When desired location is found, tighten set screw to secure.

Set-Screw

Tighten black plastic set screw to secure Wing in place.

Black Plastic Set-screw

*Monitor Mount Attachment*

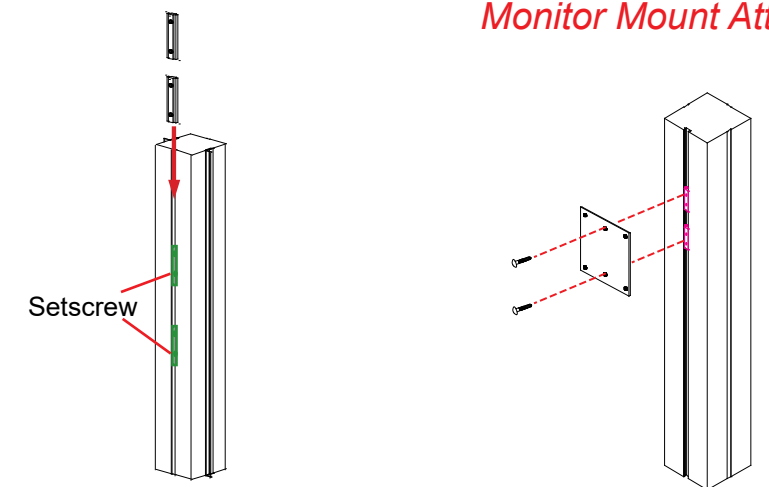

Setscrew

Slide mounting connector pieces into groove of extrusion. Tighten setscrew to secure in place.  
**Connectors should stay attached to vertical**

Attach back plate to connectors on vertical extrusion using screws. Then attach top plate and tighten setscrews to secure.

Velcro header sign to horizontal extrusions where indicated.

